

FILE COPY

L-TR-88-41

AFWL-TR-
88-41

2

FIELD ENHANCEMENT OF UHF-VHF AIRCRAFT ANTENNAS

Raymond W. Nethers, et al

August 1988

DTIC
SELECTE
OCT 11 1988
S D

Final Report

Approved for public release; distribution unlimited.

AIR FORCE WEAPONS LABORATORY
Air Force Systems Command
Kirtland Air Force Base, NM 87117-6008

88 10 6 111

This final report was prepared by the Air Force Weapons Laboratory, Kirtland Air Force Base, New Mexico under Job Order 12091501. Mr Raymond W. Nethers (NTAO) was the Laboratory Project Officer-in-Charge.

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government-related procurement, the United States Government incurs no responsibility or any obligation whatsoever. The fact that the Government may have formulated or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication, or otherwise in any manner construed, as licensing the holder, or any other person or corporation; or as conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This report has been authored by employees of the United States Government. Accordingly, the United States Government retains a nonexclusive, royalty-free license to publish or otherwise reproduce the material contained herein, or allow others to do so, for United States Government purposes.

This report has been reviewed by the Public Affairs Office and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

If your address has changed, if you wish to be removed from our mailing list, or if your organization no longer employs the addressee, please notify AFWL/NTAO, Kirtland AFB, NM 87117-6008 to help us maintain a current mailing list.

This technical report has been reviewed and is approved for publication.




RAYMOND W. NETHERS
Project Officer

FOR THE COMMANDER



ALBERT B. GRIFFIN
Chief, Test Operations Branch



FREDERICK M. JONAS
Lt Col, USAF
Chief, Aircraft & Missiles Division


DO NOT RETURN COPIES OF THIS REPORT UNLESS CONTRACTUAL OBLIGATIONS OR NOTICE ON A SPECIFIC DOCUMENT REQUIRES THAT IT BE RETURNED.

AD-A100180

REPORT DOCUMENTATION PAGE				
1a REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b RESTRICTIVE MARKINGS	
2a SECURITY CLASSIFICATION AUTHORITY			3 DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution unlimited.	
2b DECLASSIFICATION / DOWNGRADING SCHEDULE				
4 PERFORMING ORGANIZATION REPORT NUMBER(S) AFWL-TR-88-41			5 MONITORING ORGANIZATION REPORT NUMBER(S)	
6a NAME OF PERFORMING ORGANIZATION Air Force Weapons Laboratory		6b OFFICE SYMBOL (if applicable) NTAO		7a NAME OF MONITORING ORGANIZATION
6c ADDRESS (City, State, and ZIP Code) Kirtland Air Force Base, NM 87117-6008			7b ADDRESS (City, State, and ZIP Code)	
8a NAME OF FUNDING / SPONSORING ORGANIZATION		8b OFFICE SYMBOL (if applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER
8c ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS	
			PROGRAM ELEMENT NO. 64747F	PROJECT NO. 1209
			TASK NO. 15	WORK UNIT ACCESSION NO. 01
11 TITLE (Include Security Classification) FIELD ENHANCEMENT OF UHF-VHF AIRCRAFT ANTENNAS				
12. PERSONAL AUTHOR(S) Nethers, Raymond W.; Metzger, 1st Lt David W.; and Griffin, Albert B.				
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM 16Oct86 TO 18Nov86		14. DATE OF REPORT (Year, Month, Day) 1988 August
15. PAGE COUNT 12				
16. SUPPLEMENTARY NOTATION				
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP		
20	03		Electrical breakdown, Electrical discharge, Standoff voltage, Electrical field enhancements, Air arc insulation.	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Results of high voltage electrical discharge tests of various electrode enhancement geometries are reported along with test conduct. Four antennas (collins, unknown 2- and 3-ft rods) were tested with both positive and negative voltages. It was found that on the negative electrode in large gaps, a large enhancement is needed to degrade the gap holdoff.				
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL Raymond Nethers			22b. TELEPHONE (Include Area Code) (505) 844-3412	22c. OFFICE SYMBOL NTAO

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

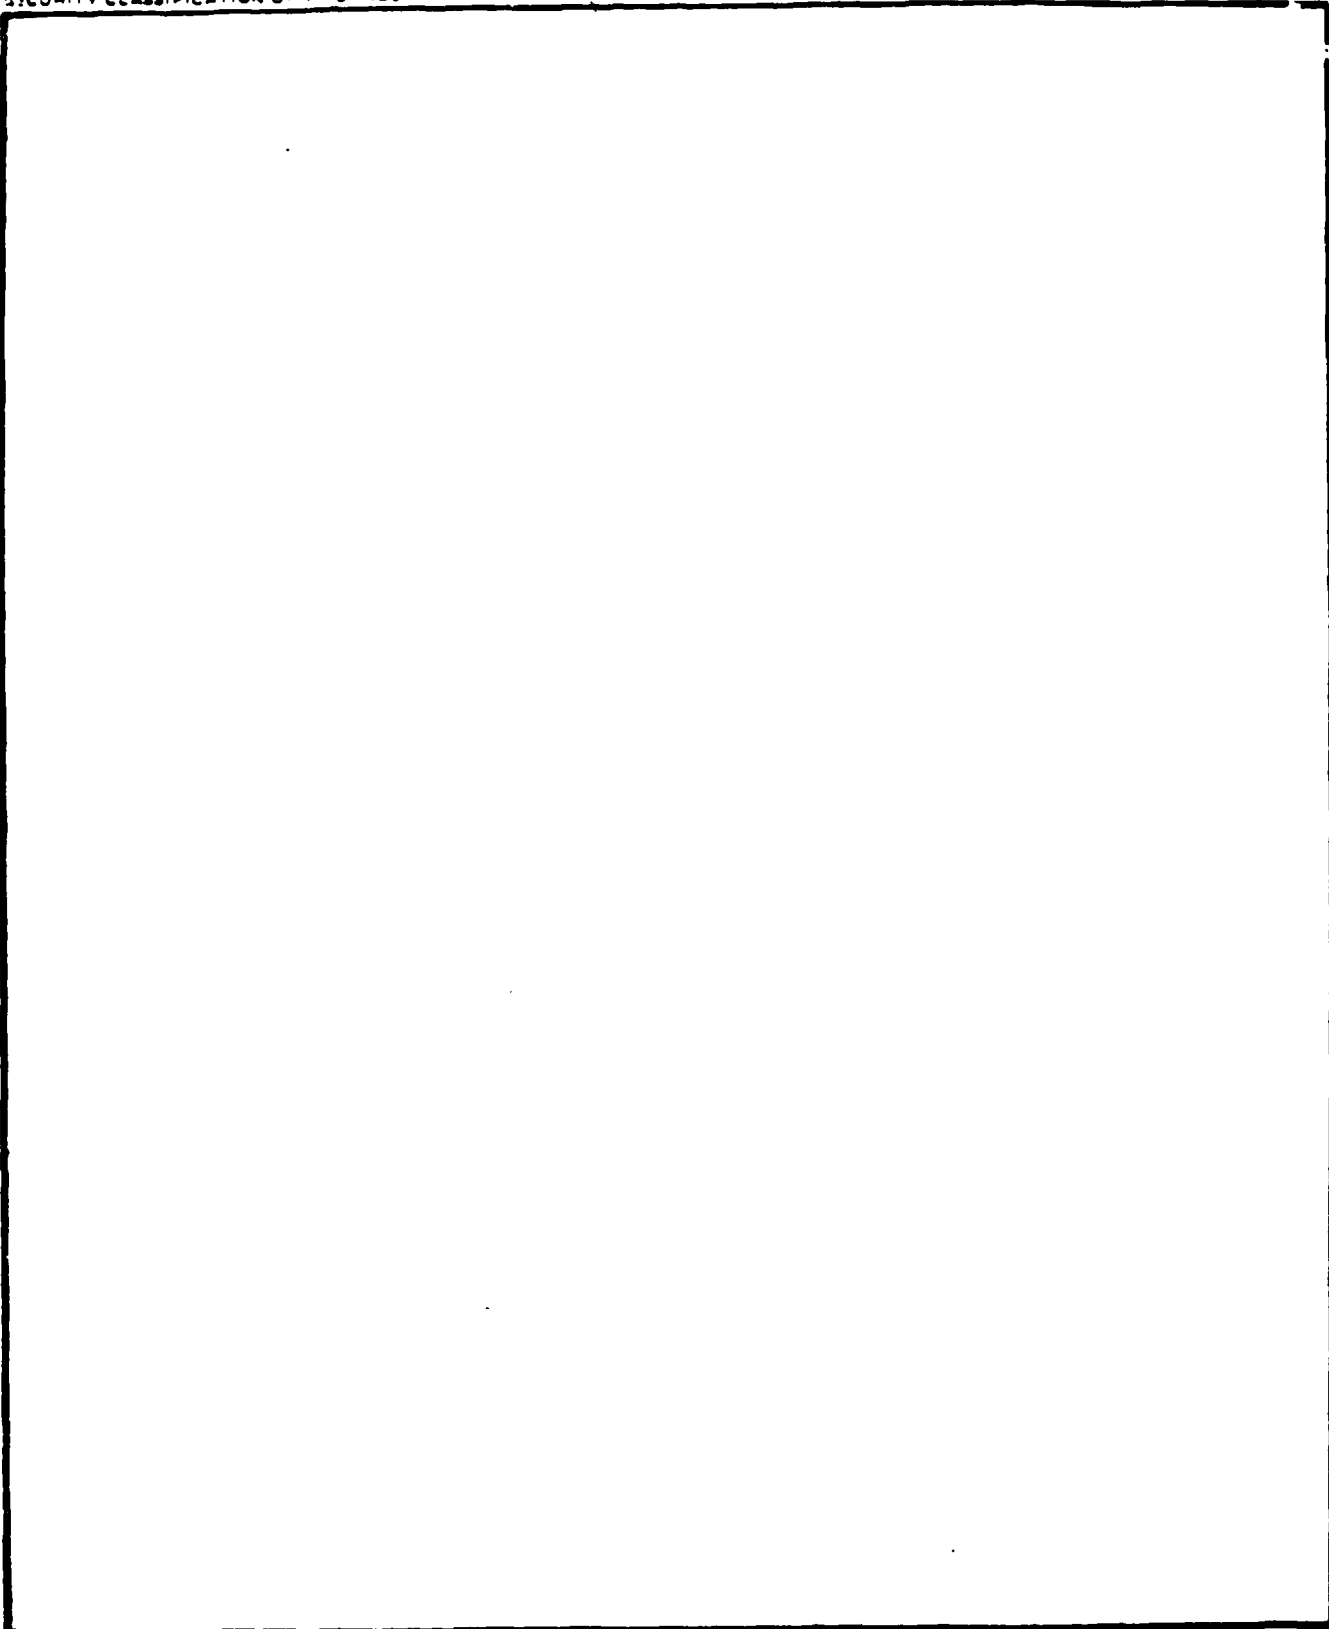

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

INTRODUCTION

The purpose of these tests was to determine how much electric field enhancement is produced by blade type UHF-VHF* aircraft antenna mounted on the underside of an aircraft fuselage or wing when the aircraft has a high voltage charge with respect to ground.



Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

*Ultrahigh frequency - very high frequency

BACKGROUND

The proposed trailing wire antenna (TWA) electromagnetic pulse (EMP) tests would require a negative voltage of up to 4 mV with a rise time of 1.6 μ s and a decay time of 50 μ s to be applied to an aircraft that is insulated from the ground without arcing between the aircraft and ground. The UHF-VHF blade antennas mounted on the bottom of the aircraft may enhance the electric field in the vicinity and may arc to ground.

TEST CONDUCT

The Ferranti Impulse Generator (FIG) which is located on the TRESTLE EMP test site was configured to produce the TWA waveshape. The Mobile Upper Electrode (MUE), which is designed to produce a uniform electric field between it and the ground plane (GP), was used for these tests. The donut-shaped MUE is about 26 ft in diameter and is covered with 1-in wire mesh. The MUE was spaced 8 ft 4 in above the GP. This spacing was chosen because it is the same spacing used in the previous "charred beam" test.

A Collins-type 37R-2V aircraft antenna was mounted on the center of the MUE. Another aircraft antenna of unknown type was also tested. These antennas were mounted on the GP also to test the positive polarity breakdown effects.

After the antenna tests were performed, it was found that the antennas did not affect the negative charge breakdown voltage. To further investigate this effect, a 1/2-in square rod was projected from the center of the MUE at distances of 2 and 3 ft. This was tested and the breakdown voltage recorded. The MUE (sans rod) was lowered to these two spacings and the breakdown voltage recorded.

The FIG output voltage was then changed to positive. The MUE-GP spacing was set at 8 ft 4 in and the flashover voltage measured. The Collins antenna was mounted on the GP and the flashover voltage measured. The antenna was then mounted on the MUE and the flashover voltage measured. This test was made to determine if the effect of the antenna was due to voltage polarity effects or the field distortion caused by the MUE.

The "up-down" method was not used to determine the breakdown voltages as the breakdown voltages observed were repeatable within a few percent.

CONCLUSIONS

Equipotential plots were computed for the MUE being 8 ft 4 in from the GP with (1) no projections, (2) a 1-ft projection, and (3) a 3-ft projection (Figs. 1, 2, and 3). These plots show the projections should have a considerable effect on the breakdown voltage. These plots are the same for either polarity.

The actual breakdown data (Table 1) shows the 1-ft antenna and the 2-ft rod did not affect the breakdown voltage for the negative polarity. The 3-ft rod greatly affected the breakdown which went from 1.31 MV to 0.8 MV. This would imply that the equipotential line spacing near the center of the MUE is not linear or that higher fields near the negative electrode do not promote breakdown.

The antennas mounted on the GP (positive charge) do effect the breakdown voltage (1.31 MV without the antenna to 1.06 MV with).

A positive FIG output test was performed to see if the enhancement results observed with the negative FIG output tests were due to enhancement by the antenna or were due to the distortion of the electric field by the MUE. This test shows a 10 percent enhancement of an antenna on the positive and no enhancement by the antenna on the negative electrode. This supports the results found from the negative FIG output tests, so the effect is not due to MUE field distortion.

If the effect observed in these tests is correct, then a fairly flat aircraft surface such as the bottom of the wing or fuselage could have projections of up to perhaps 2 ft without degrading the breakdown voltage if the aircraft is supported at least 8 ft above a flat ground plane (negative voltage on aircraft).

MUE (8'1'1) ENHANCEMENT NONE
EQUIPOTENTIAL PLOT

10:19:48 85/12/01

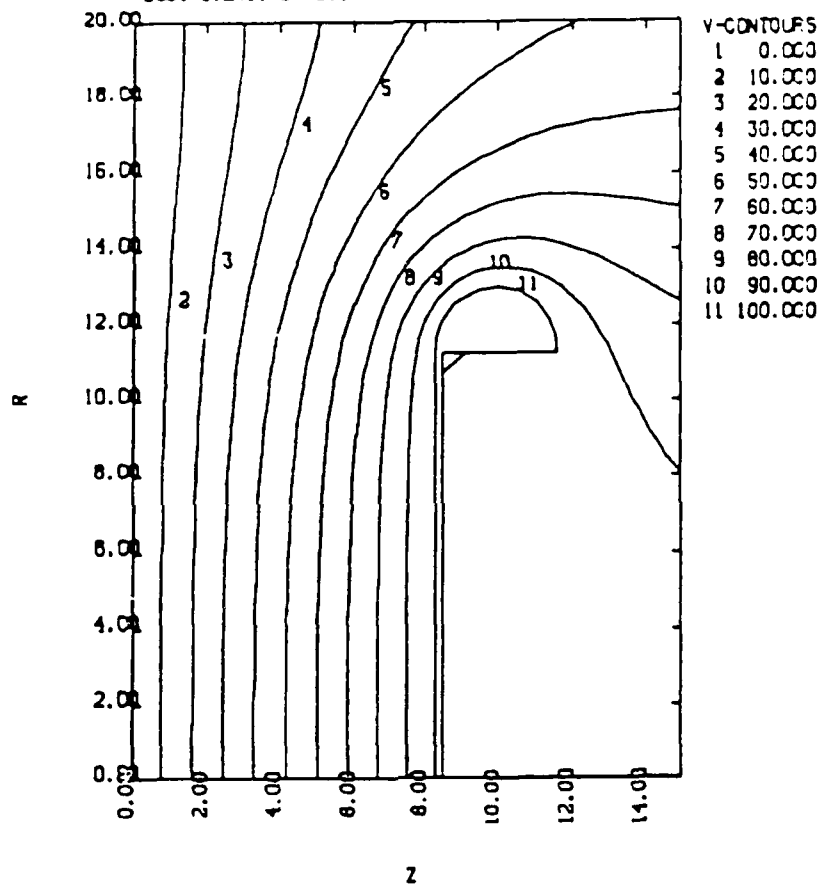


Figure 1. Equipotential plot MUE
with no enhancement.

MUE 18' 4" ENHANCEMENT 1' ANTENNA
EQUIPOTENTIAL PLOT

10:11:27 88/12/01

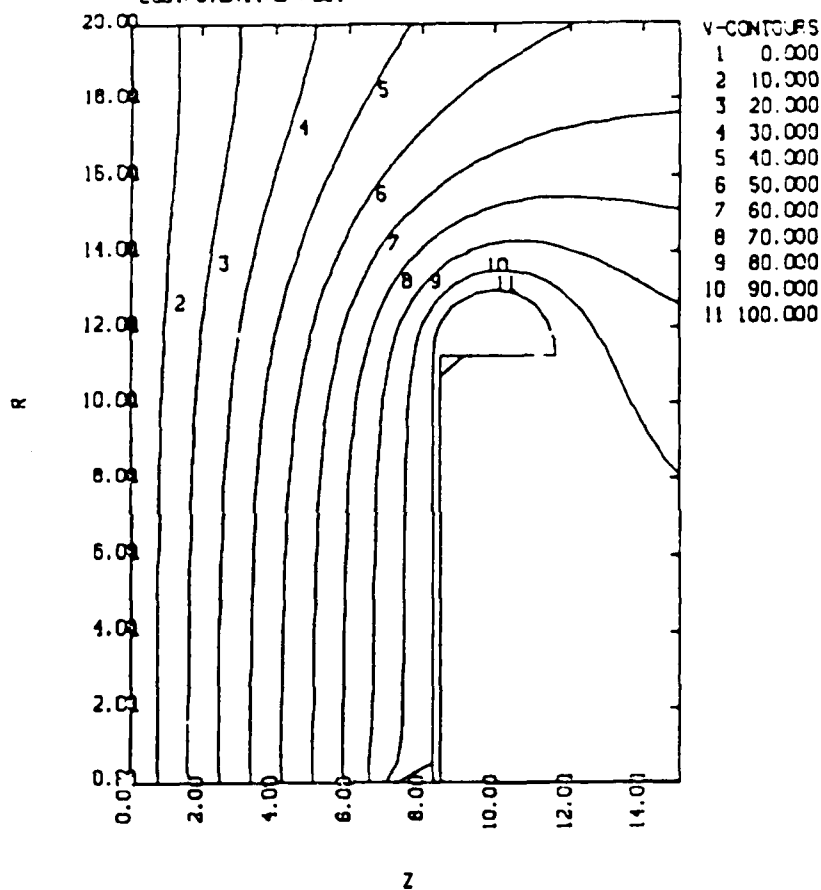


Figure 2. Equipotential plot MUE with
1-ft enhancement.

MUE (8'4") ENHANCEMENT 3' ROD
EQUIPOTENTIAL PLOT

10:25:08 85/12/01

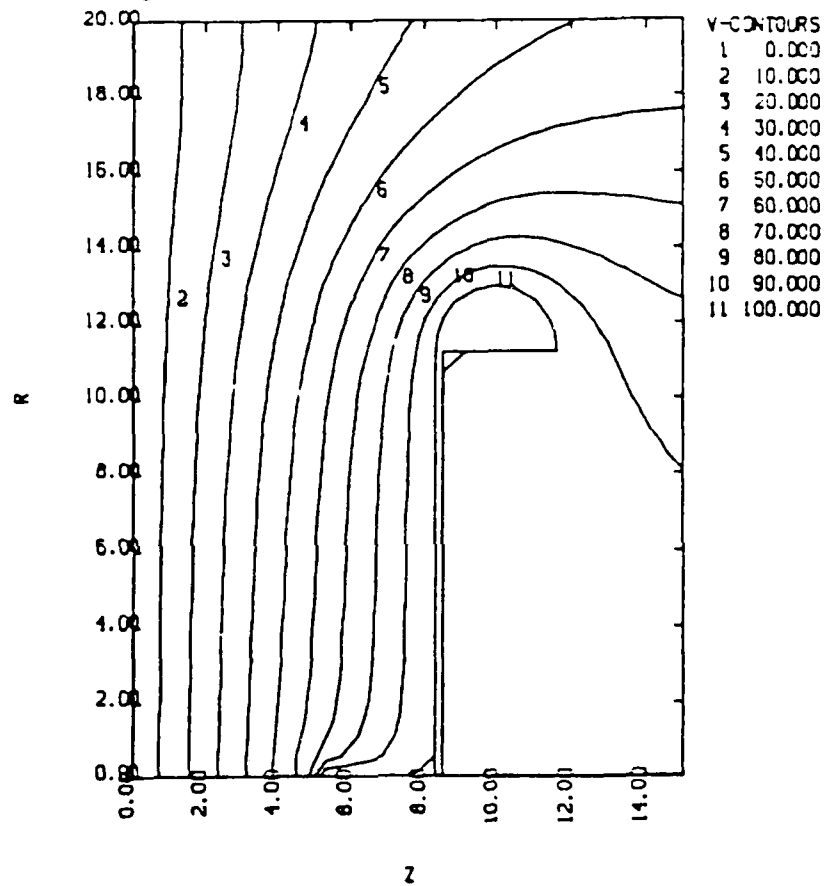


Figure 3. Equipotential plot MUE with 3-ft enhancement.

TABLE 1. Breakdown data of VHF-UHF antennas.

Negative FIG output Enhancements on negative electrode (MUE)		
<u>MUE height</u>	<u>Enhancement</u>	<u>Breakdown Voltage (MV)</u>
8 ft 4 in	Collins (1 ft)	1.31
8 ft 4 in	Unk. (1 ft)	1.38
8 ft 4 in	1/2-in sq rod (2 ft)	1.36
8 ft 4 in	1/2 in sq rod (3 ft)	0.80
Enhancements on positive electrode (GP)		
8 ft 4 in	Collins (1 ft)	1.06
8 ft 4 in	Unk (1 ft)	1.06
No enhancements		
8 ft 4 in	-	1.33
6 ft 4 in	-	1.06
5 ft 4 in	-	0.90
Positive FIG Output		
8 ft 4 in	No enhancements	1.17
8 ft 4 in	Collins (1 ft) on GP	1.15
8 ft 4 in	Collins (1 ft) on MUE	0.96